


Tabela doboru wkładów całostalowych i aramidowych

2

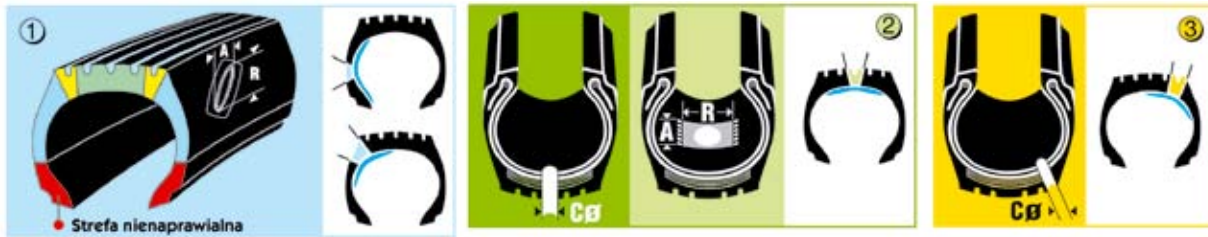

	Profil 100	Profil 85 - 80	Profil 75 - 70	Profil 65 - 60	Profil 55 - 45	max. A mm max. R mm	max. CØ mm max. A mm max. R mm	max. CØ mm	RAD Nr	
min. LI 122	6.00 - 7.50	7 R - 8.5 R 205/ - 235/	205/ - 235/	245/ - 265/		— —	10 10 10	—	115 TL	
						15 30	15 15 15	10	531 TL	
						10 75	20 20 30	12	533 TL	
						20 90	25 25 40	15	535 TL	
						30 60	—	—	225 TL	
	8.25 - 10.00 225/ - 245/	9 R - 10 R 245/ - 265/	245/ - 265/	275/ - 315/		— —	8 8 8	—	115 TL	
						12 30	15 15 15	10	531 TL	
						10 75	20 20 30	15	533 TL	
						20 90	30 30 50	20	535 TL	
						25 80	10 140	35 35 70	25	537 TL
						35 80	—	—	225 TL	
						— —	18 18 25	—	235 TL	
						— —	25 25 35	—	245 TL	
						— —	40 40 60	—	115 TL	
						— —	8 8 8	—	531 TL	
	11.00 - 13.00 12.5 R - 14.75 R	11 R - 13 R 275/ - 385/ 12/ - 14/ 14.75/	275/ - 385/ 11/ - 13/	325/ - 385/		12 25	12 12 12	10	531 TL	
						12 65	20 20 30	12	533 TL	
						20 50	25 25 50	15	535 TL	
						15 90	15 130	35 35 70	25	537 TL
						25 70	35 150	40 40 80	25	539 TL
						15 150	30 100	40 40 80	25	225 TL
						30 100	—	—	235 TL	
						40 85	—	—	245 TL	
						— —	15 15 25	—	531 TL	
						— —	25 25 35	—	533 TL	
max. LI 177	14.00 - 16.00 375/ - 445/	15R - 24R 395/ - 475/ 15.5/ -	445/ - 605/	395/ - 525/	425/ - 445/	10 20	12 12 12	8	531 TL	
						10 50	15 15 25	10	533 TL	
						10 90	20 20 30	15	535 TL	
						20 60	12 110	25 25 40	20	537 TL
						25 70	10 160	30 30 50	25	539 TL
						10 160	15 120	40 40 60	25	541 TL
						15 120	30 80	40 40 60	25	543 TL
						30 80	20 130	40 40 70	30	225 TL
						20 130	40 80	40 40 70	30	235 TL
						40 80	15 170	40 40 40	—	245 TL
45 100	—	—	—	—						
— —	15 15 15	—	—	—						
— —	25 25 25	—	—	—						
— —	40 40 40	—	—	—						

Stan aktualny na dzień wydruku. Powyższa tabela dostępna jest w wersji planszowej.